


# FAUCET INSTALLATION - CORONADO (H711) SERIES

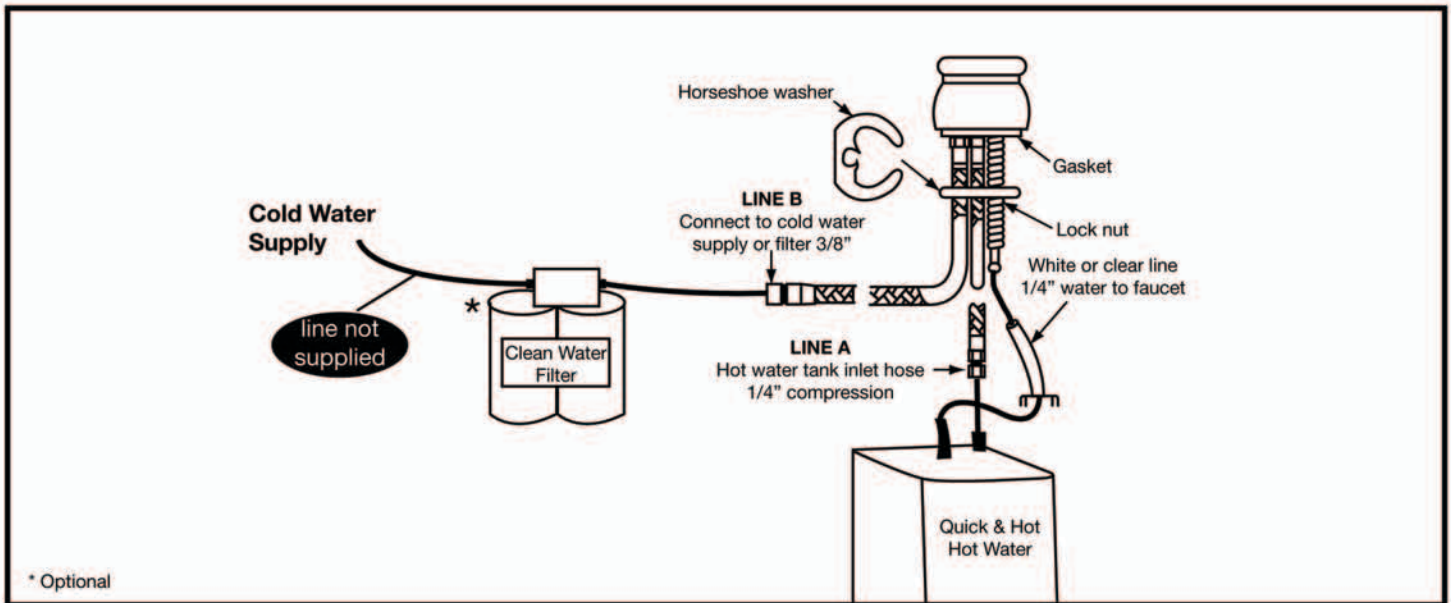

## Step 1 - Mount to Sink

Remove mounting nut, washer and support plate from threaded mounting tube.

Insert lines through 1 1/16" to 1 3/8" hole in sink or counter.

From underneath sink, slide horseshoe, washer and mounting nut over flexible rubber tube and threaded mounting tube.

Tighten the mounting nut to secure.

**Do not over-tighten.**

## Step 2 - Connect to Hot Water Dispenser

Refer to tank installation instructions and illustration above to connect the A line from the faucet to the rear corner inlet tube on top of the tank.

## Step 3 - Connecting to Cold Water Supply

Connect B line to cold water supply. Refer to tank instructions for connecting to water supply line.

**Return to tank installation instructions to complete plumbing connections and installation.**

**WARRANTY:** Quick & Hot Faucets are warranted for 1 year from the date of purchase.

Go to [amckitchen.com](http://amckitchen.com) or call (800) 854-3229 for further details.

