


FAUCET INSTALLATION - MADERA (D721) SERIES

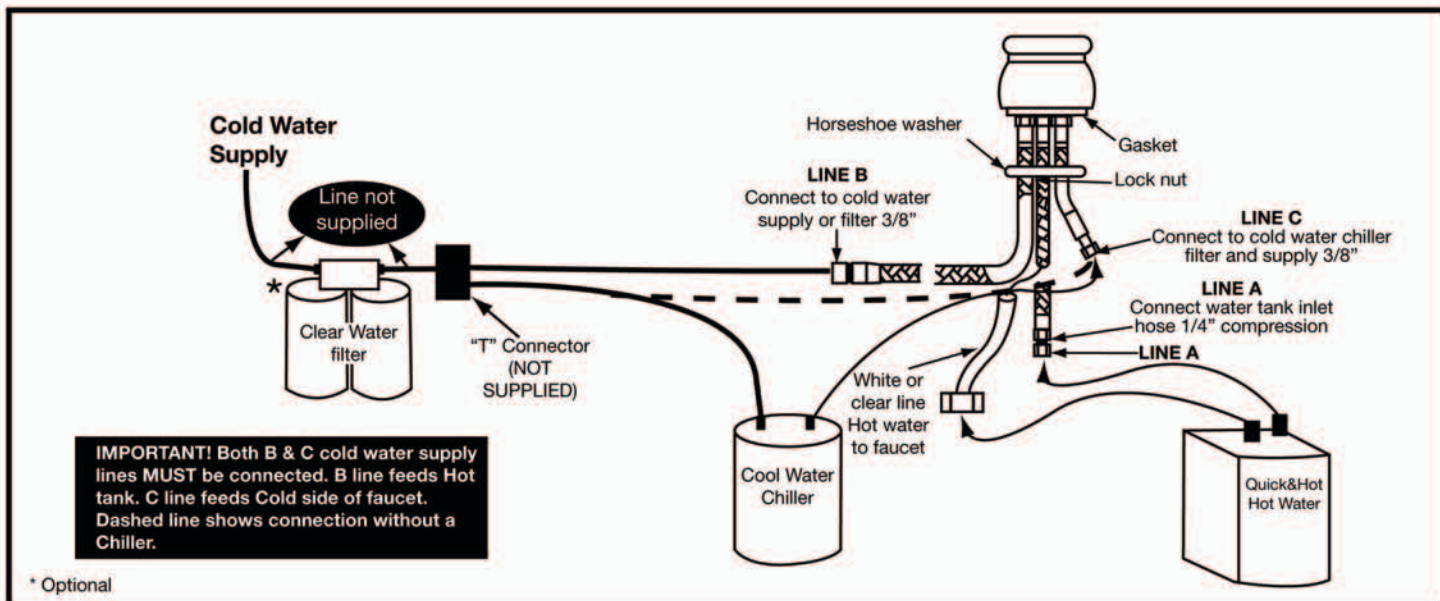

Step 1 - Mount to Sink

Remove mounting nut, washer and support plate from threaded mounting tube.

Insert lines through 1 1/16" to 1 3/8" hole in sink or counter.

From underneath sink, slide horseshoe plate, washer and mounting nut over flexible rubber tube and threaded mounting tube.

Tighten the mounting nut to secure.

Do not over-tighten.

Step 2 - Connect to Hot Water Dispenser

Refer to tank installation instructions and illustration above to connect the line A from the faucet to the rear corner inlet tube on top of the tank.

Connecting to Chiller, Filter, etc. to Cold Water Supply

Refer to appliance installation instructions and illustration above for chiller and/or filter connections.

NOTE: Both B and C lines **MUST** be connected.

See illustration above.

Step 3 - Connecting to Cold Water Supply

Connect line B to cold water supply. Refer to tank instructions for connecting to water supply line.

Return to tank installation instructions to complete plumbing connections and installation.

WARRANTY: Quick & Hot Faucets are warranted for 1 year from the date of purchase.

Go to amckitchen.com or call (800) 854-3229 for further details.

